

GENERAL NOTES:


1. THE CONTRACTOR SHALL REMOVE ITEMS AS INDICATED AND PROVIDE SALVAGE PER THE OWNER'S REPRESENTATIVE. REMOVAL SHALL INCLUDE, BUT IS NOT LIMITED TO OUTLET, JUNCTION BOX, CONDUITS, CONDUCTORS, ETC. BACK TO SOURCE OR TO NEAREST ACCESSIBLE POINT OF ORIGIN.
2. THE CONTRACTOR SHALL BE RESPONSIBLE TO MAINTAIN THE CONTINUITY OF ALL FEEDERS AND BRANCH CIRCUITS SCHEDULED TO REMAIN WHICH MAY ROUTE THROUGH THE AREA OF DEMOLITION.
3. THE CONTRACTOR SHALL PROVIDE TYPED, UPDATED PANEL SCHEDULES.

SHEET NOTES:

1. UNLESS NOTED OTHERWISE, THE CONTRACTOR SHALL REMOVE ALL EXISTING ELECTRICAL OUTLETS IN THIS AREA. REMOVAL SHALL INCLUDE, BUT IS NOT LIMITED TO OUTLET, JUNCTION BOX, CONDUITS, CONDUCTORS BACK TO SOURCE OR TO NEAREST POINT OF ORIGIN.
2. APPROXIMATE LOCATION OF EXISTING PANELS THAT SERVE ELECTRICAL COMPONENTS IN THIS AREA OF DEMOLITION. THE CONTRACTOR SHALL COORDINATE WITH THE EXISTING TENANT TO GAIN ACCESS TO EXISTING EQUIPMENT.
3. EXISTING ELECTRICAL CONNECTION TO THIS HVAC UNIT SHALL REMAIN. PROTECT THROUGHOUT DEMOLITION.
4. EXISTING ELECTRICAL CONNECTION TO EXISTING HVAC EQUIPMENT SHALL BE REMOVED BACK TO SOURCE. REMOVAL SHALL INCLUDE, BUT IS NOT LIMITED TO DISCONNECT, CONDUITS, CONDUCTORS, ETC. BACK TO SOURCE.

ACKAL A PROFESSIONAL CORPORATION
 ARCHITECTS
 105 CHAPEL DRIVE - LAFAYETTE, LOUISIANA 70506
 337-988-5271 ph. - 337-988-5272 fax
 www.ackalarchitects.com

INTERIOR TENANT IMPROVEMENT FOR:
 IMMUNOTEK BIO CENTERS, LLC
 4550 LAKE NORTH ROAD
 OFFICE DEPOT PLAZA, SUITE B-5
 LAKE WORTH, PALM BEACH COUNTY, FL 33463

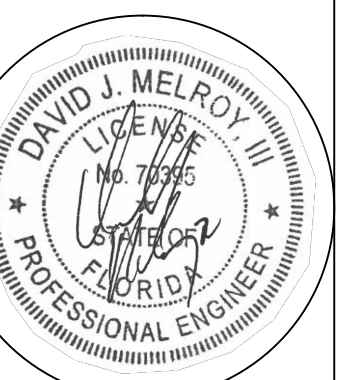

AUG. 02, 2016

COPYRIGHT © 2016 ACKAL ARCHITECTS, APC.
 THIS DOCUMENT IS THE PROPERTY OF
 ACKAL ARCHITECTS, APC.
 THIS DOCUMENT MAY NOT BE COPIED,
 REPRODUCED OR USED WITHOUT
 WRITTEN CONSENT FROM
 ACKAL ARCHITECTS, APC.

proj. no. 16-002
 date: 08-02-2016
 project architect: B.A.
 project manager: A.D.
 drawn by: MSA
 file name: LAKEWORTH
 revised:
 plot scale: AS NOTED
 sheet name:
 ELECTRICAL
 DEMOLITION PLAN

sheet no.
 ED2.0

A ELECTRICAL DEMOLITION PLAN
 ED2.0 1/8" = 1'-0"

