

## GENERAL NOTES

- DEFINITION:** THE WORD "PROVIDE" MEANS FURNISH, INSTALL, FEED, AND CONNECT WITH ALL ACCESSORIES AND ANCILLARY EQUIPMENT FOR A COMPLETE AND OPERABLE INSTALLATION.
- CODES:** ALL ELECTRICAL WORK SHALL BE PERFORMED IN ACCORDANCE WITH ALL ADOPTED APPLICABLE CODES AND ORDINANCES.
- COMPLETE INSTALLATION:** PROVIDE ALL LABOR, MATERIALS, EQUIPMENT, TOOLS, ACCESSORIES, ETC., NECESSARY TO ACCOMPLISH A COMPLETE ELECTRICAL SYSTEM IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS.
- GROUNDING:** GROUND ALL EQUIPMENT AND SYSTEM NEUTRAL IN ACCORDANCE WITH ARTICLE 250 OF THE NEC. PROVIDE CODE SIZED EQUIPMENT GROUNDING CONDUCTOR IN ALL FEEDERS AND BRANCH CIRCUIT RACEWAYS. WHERE ISOLATED GROUNDS ARE INDICATED, PROVIDE INSULATED CONDUCTOR.
- CIRCUITING:** ALL WIRING SHALL BE IN CONDUIT, CONCEALED EXCEPT WHERE NOTED. EMT WITH DIE CAST SET SCREW FITTINGS MAY BE USED IN DRY, PROTECTED INTERIOR LOCATIONS. PVC SCHEDULE 40 SHALL BE USED BELOW GRADE AT MINIMUM 24". UNSHIPPED RIGID ELBOWS AND RISERS SHALL BE USED FOR ALL THROUGH-GRADE TRANSITIONS AND STUB-UPS. RGS OR IMC CONDUIT WITH THREADED FITTINGS SHALL BE USED IN ALL LOCATIONS WHERE EXPOSED TO THE ELEMENTS OR SUBJECT TO PHYSICAL DAMAGE. METAL-CLAD CABLE (TYPE MC) MAY BE USED WHERE ALLOWED BY CODE AND LOCAL AUTHORITIES HAVING JURISDICTION (ALL HOMERUNS SHALL BE IN CONDUIT) AND INSTALLED PER NEC ARTICLE 330. TYPE ENT RACEWAY IS NOT ALLOWED. CONNECT RECESSED AND SUSPENDED LIGHT FIXTURES, MOTORIZED AND VIBRATING EQUIPMENT WITH STEEL FLEX. ALL CONDUIT SHALL HAVE FULL CORD IF OTHER WIRE EMPTY.
- WIRING:** WIRE SHALL BE COPPER UNLESS OTHERWISE NOTED, STRANDED IN SIZES 18 AWG AND LARGER. WHERE ALUMINUM IS INDICATED, WIRE SHALL BE COMPACTED-STRAND TYPE WITH JOINT COMPOND AT TERMINATIONS. INSULATION SHALL BE TYPE THIN OR THIN (XHHW FOR ALUMINUM). ALUMINUM CONDUCTORS SHALL NOT BE USED IN SIZES SMALLER THAN #10 (200 A EQUIPMENT FEEDER), AND WHEN USED SHALL BE TERMINATED IN INSULATED COMPRESSION-TYPE CU/AL FITTING ("MAC-ADAPT" OR EQUAL).
- EXISTING CONDITIONS:** CONTRACTOR SHALL VISIT THE SITE AND FAMILIARIZE HIMSELF WITH ALL EXISTING AND PROPOSED CONDITIONS WHICH MAY AFFECT THE COURSE OF HIS WORK. CONTRACTOR SHALL REPORT ALL DISCREPANCIES AND UNACCEPTABLE CONDITIONS TO ENGINEER PRIOR TO BID. NO EXTRAS WILL BE ALLOWED FOR FAILURE TO COMPLY WITH THIS REQUIREMENT.
- PERMITS:** OBTAIN AND PAY FOR ALL BUILDING AND WORKING PERMITS AND INSPECTION FEES REQUIRED FOR THIS PROJECT.
- UTILITY SERVICES:** PROVIDE POWER AND COMMUNICATIONS SYSTEM SERVICES IN ACCORDANCE WITH THE REQUIREMENTS OF THE SERVING UTILITIES. PROVIDE EXCAVATION, RACEWAY, STRUCTURES, GROUNDING, ETC. AS DIRECTED. POWER SERVICES AND DISTRIBUTION SYSTEM AIC, RATING SHALL EXCEED MAXIMUM AVAILABLE FAULT CURRENT THROUGH UTILITY SERVICE TRANSFORMER. CONTACT SERVING UTILITIES AND OBTAIN THEIR REQUIREMENTS PRIOR TO BID. (UTILITY SERVICE AND LINE EXTENSION CHARGES PAID BY OTHERS.)
- TEMPORARY CONSTRUCTION POWERS:** PROVIDE TEMPORARY ELECTRICAL POWER DISTRIBUTION AND LIGHTING AS REQUIRED FOR ALL TRADES THAT REQUIRE SERVICE DURING THE COURSE OF THIS PROJECT IN COMPLIANCE WITH ALL NEC AND OSHA REQUIREMENTS. (ENERGY COSTS BY OTHERS.)
- FIRE STOPPING:** ALL PENETRATED FIRE RATED SURFACES SHALL BE FIRE SEALED WITH APPROVED UL LISTED SEALANTS AS LISTED WITHIN ARCHITECTURAL SPECIFICATIONS. DO NOT EXCEED MAXIMUM ALLOWABLE SURFACE PENETRATIONS DEPENDENT ON RATING OF SURFACES. REFER TO ARCHITECTURAL DRAWINGS FOR DETERMINATION OF PENETRATION LOCATIONS THROUGH FIRE RATED ASSEMBLIES.
- FUSES AND CIRCUIT BREAKERS:** FUSES AND CIRCUIT BREAKERS SHALL BE SIZED PER ACTUAL RESPECTIVE APPLICATION (I.e., MOTOR CIRCUIT PROTECTOR, GROUND FAULT CIRCUIT INTERRUPTER, ARC FAULT CIRCUIT INTERRUPTER, ETC.). FUSES SHALL BE DUAL ELEMENT, CURRENT-LIMITING, AND SHALL BE INTERCHANGEABLE BETWEEN FRAME SIZES WITH STANDARD FACTORY FUSE REDUCERS. PROVIDE LOCKABLE SPARE FUSE CABINET WITH THREE (3) SPARE FUSES OF EACH SIZE USED.
- EQUIPMENT STANDARDS:** ALL MATERIALS AND EQUIPMENT SHALL BE NEW AND OF THE HIGHEST QUALITY AVAILABLE ("SPECIFICATION GRADE"). LIGHTING FIXTURES SHALL HAVE ELECTRONIC BALLASTS AND ACRYLIC LENSES. SERVICE EQUIPMENT SHALL BE FACTORY ASSEMBLED COMMERCIAL GRADE, CONFIGURED PER SERVING UTILITY STANDARDS. PANELBOARDS SHALL HAVE BOLT-ON CIRCUIT BREAKERS. WIRING DEVICES SHALL BE SPECIFICATION GRADE WITH NYLON PLATES, IVORY UNLESS OTHERWISE NOTED. RAISED STEEL BOX COVERS MAY BE USED IN UTILITY AREAS.
- GUARANTEE:** THE COMPLETE ELECTRICAL SYSTEM, AND ALL PORTIONS THERE OF, SHALL BE GUARANTEED TO BE FREE FROM DEFECTS IN WORKMANSHIP AND MATERIALS FOR A PERIOD OF ONE YEAR FROM DATE OF FINAL ACCEPTANCE. PROMPTLY REMEDY SUCH DEFECTS AND ANY SUBSEQUENT DAMAGE CAUSED BY THE DEFECTS OR REPAIR THEREOF AT NO EXPENSE TO THE OWNER. LIGHT BULBS ARE EXEMPT FROM THIS GUARANTEE, BUT SHALL BE NEW AND UNUSED AT TIME OF FINAL ACCEPTANCE.
- SUBMITTALS:** SUBMIT EIGHT COPIES OF FACTORY SHOP DRAWINGS FOR ALL LIGHTING FIXTURES, SWITCHGEAR, PANELS, MOTOR CONTROLS, WIRING DEVICES, ETC. PROPOSED FOR THIS PROJECT. PROPOSED SUBSTITUTIONS SHALL BE EQUAL OR SUPERIOR TO SPECIFIED ITEMS IN ALL RESPECTS. DETERMINATION OF EQUALITY RESTS SOLELY WITH ENGINEER.
- LOCATIONS:** INDICATED LOCATIONS OF ALL OUTLETS AND EQUIPMENT ARE SUBJECT TO CHANGE. SHIFT/RELOCATE/RECONFIGURE ANY OUTLET, EQUIPMENT OR CONNECTION POINT UP TO 10' AS DIRECTED BY ENGINEER AT NO ADDED COST.
- IDENTIFICATION:** IDENTIFY ALL EQUIPMENT, SWITCHBOARD CIRCUITS AND ELECTRICALLY CONNECTED EQUIPMENT WITH ENGRAVED NAMEPLATES. NAMEPLATES SHALL BE FASTENED WITH A MINIMUM OF TWO (2) SCREWS. PANEL DIRECTORIES SHALL BE TYPED.
- PANELBOARDS:** PANELS SHALL HAVE FLUSH MONO-FLAT TRIM, PIANO HINGED DOORS AND COVER (DOOR-IN-DOOR) WITH LOCKABLE MASTER-KEYED FLUSH CATCHES AND BOLT-ON CIRCUIT BREAKERS. FLUSH-MOUNTED PANELS SHALL HAVE EMPTY CONDUITS STUBBED TO ACCESSIBLE ATTIC SPACE: (1) 1" CONDUIT FOR EACH (4) SPARE/SPACE CIRCUITS.
- TAMPERPROOF:** ALL EQUIPMENT AND CIRCUITING ACCESSIBLE BY THE PUBLIC SHALL BE DEMONSTRATED TO BE TAMPERPROOF AND VANDAL RESISTANT. OPENABLE DEVICES AND EQUIPMENT SHALL BE PAD LOCKABLE.
- SUPPORTS AND HANGERS:** SUPPORT AND ALIGN ALL RACEWAYS, CABINETS, BOXES, BACK BOXES, FIXTURES, AND EQUIPMENT FROM STRUCTURE. SECURE ALL SUPPORTING METHODS BY MEANS OF TOGGLE BOLTS IN HOLLOW MASONRY, EXPANSION BOLTS IN SOLID MASONRY, CONCRETE FRESHET INSERTS OR EXPANSION BOLTS IN CONCRETE, MACHINE SCREWS OR BOLTS IN METAL, AND WOOD SCREWS IN WOOD CONSTRUCTION. ALL SUPPORTING SYSTEMS AND COMPONENTS SHALL BE RATED FOR FIVE (5) TIMES THE ACTUAL LOAD.
- ELECTRIC ROOM CODE COMPLIANCE:** DUE TO THE DIAGRAMMATIC NATURE OF THE DESIGN DOCUMENTS (ELECTRICAL, MECHANICAL, PLUMBING, FIRE SPRINKLER, ETC.), IT SHALL BE THIS CONTRACTOR'S RESPONSIBILITY TO COORDINATE WITH ALL OTHER SUBCONTRACTORS AT THE START OF THIS PROJECT TO INFORM AND VERIFY THAT NO FOREIGN SYSTEMS OR EQUIPMENT PASS THROUGH THE DESIGNATED ELECTRIC ROOMS AND THAT A MINIMUM OF 1'-0" IS PROVIDED AS CLEAR HEADROOM ALONG ACCESS PATHS TO ALL ELECTRIC ROOMS. ANY REROUTING OR RELOCATION OF SYSTEMS THAT A SUBCONTRACTOR OR FEELS WILL COMPROMISE THE INITIAL DESIGN INTENT SHALL BE DESCRIBED IN WRITING AND FORWARDED TO THE DESIGN ENGINEER FOR FURTHER REVIEW. ALL PIPING TO HVAC UNITS THAT COOL ELECTRIC ROOMS SHALL BE LOCATED ABOVE THE ENTRY DOORS WHEN EVER POSSIBLE. THE SPRINKLER PIPING TO PROVIDE PROTECTION FOR THE ELECTRIC ROOM IS PREFERRED TO ENTER THE ROOM ABOVE THE ENTRY DOOR AND RUN DOWN THE AISLE SPACES OF THE ROOM. ALL INSTALLATIONS SHALL BE FULLY COORDINATED AMONG ALL TRADES.
- ELECTRICALLY-OPERATED EQUIPMENT-FEEDERS AND OVERCURRENT DEVICES COORDINATION:** FEEDERS AND OVERCURRENT DEVICES (INCLUDING STARTERS, DISCONNECTS, ETC.) HAVE BEEN DESIGNED BASED ON INFORMATION PROVIDED BY THE RESPONSIBLE CONSULTANT AND/OR DESIGNATED SUPPLIER. PRIOR TOROUGH-IN, COORDINATE WITH THE APPROPRIATE TRADE AND/OR INSTALLER TO DETERMINE THAT THE ACTUAL NAMEPLATE ELECTRICAL REQUIREMENTS MATCH THIS DESIGN. ALL COST REDUCTION VALUE ENGINEERING, SUBSTITUTION PROPOSALS, ETC. CONCERNING ELECTRICALLY POWERED EQUIPMENT AND SYSTEMS WHICH IMPACT THE ELECTRICAL SYSTEMS OF THIS PROJECT SHALL INCLUDE ALL ELECTRICAL COSTS AND/OR CREDITS ASSOCIATED WITH SUCH PROPOSALS AND SHALL BE COORDINATED AMONGST THE GENERAL CONTRACTOR AND THE SEVERAL AFFECTED TRADES PRIOR TO SUBMISSION FOR REVIEW.
- COORDINATION:** THIS PROJECT REQUIRES A HIGH LEVEL OF COORDINATION AND COOPERATION WITH OWNER, ARCHITECT, OTHER TRADES, VENDORS, AND SPECIALTY CONTRACTORS. THIS CONTRACTOR SHALL OBTAIN AND STUDY SHOP DRAWINGS OF ALL ELECTRICALLY CONNECTED EQUIPMENT AND SHALL ADJUST POINTS OF CONNECTION, LOCATIONS, AND MOUNTING HEIGHTS AS NECESSARY PRIOR TO ROUGH-IN.
- BIDDING:** THE CIVIL, ARCHITECTURAL, MECHANICAL, KITCHEN AND INTERIOR DRAWINGS CONTAIN DETAIL DESCRIPTIONS, CIRCUITING AND CONNECTION REQUIREMENTS WHICH ARE PART OF DIVISION 16 RESPONSIBILITIES. THIS CONTRACTOR SHALL NOT SUBMIT BIDS ON THIS PROJECT BEFORE REVIEWING ALL PROJECT DRAWINGS, SPECIFICATIONS, AND APPENDIX A.
- FIRE ALARM:** THE CONTRACTOR SHALL PROVIDE A COMPLETE FIRE ALARM SYSTEM IN FULL ACCORDANCE WITH LOCAL, STATE AND ADA REQUIREMENTS. THESE DOCUMENTS DO NOT INDICATE DEVICES, OUTLETS, CONNECTIONS, AND CIRCUITRY NECESSARY FOR A COMPLETE FIRE ALARM SYSTEM. OBTAIN FIRE MARSHAL APPROVED SHOP DRAWINGS PRIOR TO COMMENCEMENT OF ROUGH-IN. PROVIDE COMPLETE SYSTEM TESTING UPON COMPLETION OF INSTALLATION AND PRIOR TO FIELD ACCEPTANCE BY OWNER.
- ADDITIONAL SYSTEMS AND EQUIPMENT CONNECTIONS:** IN ADDITION TO EQUIPMENT POWER FEEDERS AND CONNECTIONS INDICATED ON THE ELECTRICAL DRAWINGS, PROVIDE 120V CONTROL POWER CONNECTIONS TO SMOKE/FIRE DAMPERS, VAV BOXES, TEMPERATURE CONTROL, AND FIRE ALARM PANELS, DOOR HOLDING/LATCHING DEVICES, ETC. AS INDICATED IN THE PROJECT DRAWINGS AND SPECIFICATIONS AS WELL AS ALL DESIGN-BUILD SYSTEM DRAWINGS.

ITEM	POWER SOURCE	NO. PER 20A CIRCUIT	PROVIDES SMOKE DETECTORS
FIRE/SMOKE DAMPER	EMERGENCY	10	YES
VAV TERMINAL (NOFAN)	NORMAL (VERIFY)	10	NO
TEMPERATURE CONTROL PANEL	EMERGENCY (VERIFY)	1	NO
FIRE ALARM PANEL	EMERGENCY	10	NO
DOOR HOLDING/LATCHING DEVICES	EMERGENCY	10	NO

## DRAWING INDEX

SHEET NUMBER	SHEET TITLE	PERMIT ISSUE DATE: 08-02-2016	ADDITIONAL 1 DATE: 03-02-2016	ADDITIONAL 2 DATE: 03-02-2016	ADDITIONAL 3 DATE: 03-02-2016
E00	SYMBOL LIST AND GENERAL NOTES	●	●		
E01	SINGLE LINE DIAGRAM	●			
E02	PANEL SCHEDULES	●	●		
E03	LIGHTING FIXTURE SCHEDULE	●			
E04	LIGHTING COMPLIANCE CERTIFICATE	●			
ED20	ELECTRICAL DEMOLITION PLAN	●			
E20	POWER PLAN	●	●		
E21	SIGNAL PLAN	●			
E22	LIGHTING PLAN	●			
E23	ELECTRICAL ROOF PLAN	●			
TOTAL		10	3		

## DESIGN BUILD FIRE ALARM SYSTEM NOTES

- IN ADDITION TO SPECIFICATIONS NOTE #8, THE FOLLOWING ITEMS SHALL BE INSTALLED OR RELOCATED COMPLETE:
- ALL MONITORING, DEVICES, WIRING, TESTING, ETC. FOR ALL DUCT DETECTORS.
  - LIFE SAFETY DEVICES SUCH AS FIRE ALARM PULL STATIONS, HORN STROBES, ETC.
  - ALL DETECTOR POWER SHALL BE HARWIRED INTO HOUSE PANEL.
  - ALL DETECTOR MONITORING SHALL BE ON HOUSE MONITORING PANEL.
  - DETECTORS SHALL BE "SMOKE" TESTED FOR BUILDING INSPECTIONS PER LOCAL JURISDICTION HAVING AUTHORITY OR HVAC UNITS SHALL BE HOT WIRED FOR DETECTOR INSPECTIONS. INCLUDE ALL ASSOCIATED COSTS.
  - INCLUDE ALL CONDUIT, WIRE, CONNECTIONS, ETC. TO FIRE RISER ALARM PANEL.
  - WHERE APPLICABLE, INCLUDE ALL CONDUIT, WIRE, CONNECTIONS, ETC. TO PIV VALVES. COORDINATE WITH SITE UTILITIES CONTRACTOR FOR COMPLETE SCOPE OF THIS WORK.
  - WHERE APPLICABLE, INCLUDE ALL CONDUIT, WIRE, CONNECTIONS, ETC. TO DCSA ALARM POINTS. COORDINATE WITH SITE UTILITIES CONTRACTOR FOR COMPLETE SCOPE OF THIS WORK.
  - CONTRACTOR MUST TAKE ALL PRECAUTIONS TO PROTECT SPRAYED ON FIREPROOFING. FURTHERMORE, CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPAIR OF THE SAME IF DAMAGED OR REMOVED DURING CONSTRUCTION.
  - THERE SHALL NOT BE ANY CONNECTION TO THE DEPARTMENT OF AVIATION ENCS/LIFE SAFETY OR SPRINKLER SYSTEMS WITHOUT PRIOR WRITTEN APPROVAL FROM AN AUTHORIZED DOA REPRESENTATIVE.


## ELECTRICAL SYMBOL LIST

NOTE: THIS IS A MASTER SCHEDULE. NOT ALL SYMBOLS AND/OR ABBREVIATIONS CONTAINED HEREIN MAY APPEAR ON THE DRAWINGS.

	FLUORESCENT FIXTURE - RECESSED, LAY-IN		SWITCHGEAR
	FLUORESCENT FIXTURE - RECESSED, FLANGED		PANELBOARD - SURFACE MOUNTED
	FLUORESCENT FIXTURE - SURFACE		PANELBOARD - FLUSH MOUNTED
	FLUORESCENT FIXTURE - SUSPENDED		EXISTING / RELOCATED PANELBOARD - SURFACE MOUNTED
	FLUORESCENT FIXTURE - OPEN STRIP WITH WIRE GUARD		EXISTING / RELOCATED PANELBOARD - FLUSH MOUNTED
	FLUORESCENT FIXTURE - WALL MOUNTED		TRANSFORMER
	INCANDESCENT, H.I.D. OR MINI-FLUORESCENT - SURFACE OR RECESSED, PER FIXTURE SCHEDULE		ENCLOSED CIRCUIT BREAKER
	INCANDESCENT, H.I.D. OR MINI-FLUORESCENT - WALL BRACKET		FIRE ALARM EQUIPMENT
	INCANDESCENT, H.I.D. OR MINI-FLUORESCENT - WALL WASH		COMBINATION FIRE/SMOKE DAMPER
	LOW VOLTAGE INCANDESCENT FIXTURE		SMOKE DAMPER
	CHANDELIER (PROVIDE 5X STRUCTURAL BACKING)		SHUNT TRIP STATION
	FAN (PROVIDE 5X STRUCTURAL BACKING)		CONTROL STATION AT 48" TO TOP UON (PER ADA)
	SPOTLIGHT - J-BOX OR TRACK MOUNTED - TRACK LENGTH AS INDICATED		RELAY
	STEP LIGHT - SURFACE OR RECESSED, PER FIXTURE SCHEDULE		CONTACTOR WITH INTEGRAL HOA SELECTOR
	BOLLARD		MAGNETIC STARTER, SIZE 1 UON
	POLE OR POST - ARM OR TOP MOUNTED CUT-OFF LUMINAIRE		DISCONNECT SWITCH: 30/3 UON (FUSIBLE (FPEN), N-NONFUSIBLE)
	TUN-LAMP BATTERY PACK - UNSWITCHED, WALL MOUNTED (LOCATE 12" BELOW CEILING UON)		COMBINATION STARTER 4 DISCONNECT, SIZE 1 UON
	TUN-LAMP BATTERY PACK - UNSWITCHED, CEILING MOUNTED, FLUSH OR SURFACE PER FIXTURE SCHEDULE		VARIABLE FREQUENCY DRIVE
	EXIT LIGHT - FACES AND ARROWS AS INDICATED, UNIVERSAL MOUNTING, UNSWITCHED		SINGLE-PHASE MOTOR CONTROL ASSEMBLY: HP-RATED SWITCH AND POWER RELAY 201 (UON)
	EXIT LIGHT - COMBINATION SINGLE FACE, ARROWS AS INDICATED WITH TUN LAMP BATTERY PACK, UNIVERSAL MOUNTING, UNSWITCHED		FULL BOX - SIZE AND LOCATION AS REQUIRED
	EXIT LIGHT - LOW LEVEL: 6" - 8" AFF. TO BOTTOM 4" MAX. OFF DOOR FRAME		JUNCTION BOX - SIZE PER NEC REQUIREMENTS
	LOW VOLTAGE		MECHANICAL EQUIPMENT DESIGNATION
	NEON		MOTOR OUTLET
	FIXTURE, EQUIPMENT ON EMERGENCY		LIGHTING FIXTURE DESIGNATION: TYPE FL 120 WATTS QUANTITY * 3
	SWITCHES AT 48" TO TOP UON (PER ADA)		EQUIPMENT LOAD
	SWITCH - SINGLE POLE		DEMAND LOAD
	SWITCH - DOUBLE POLE		STANDBY LOAD
	SWITCH - THREE WAY		SHEET NOTE DESIGNATION
	SWITCH - OCCUPANCY TYPE		FEEDER DESIGNATION (SEE FEEDER SCHEDULE)
	SWITCH - EMERGENCY		CIRCUITING IN WALL OR ABOVE CEILING
	SWITCH - PILOT TOGGLE (CONFIRM LIGHTED POSITION)		CIRCUITING IN FLOOR OR BELOW GRADE
	SWITCH - KEYED OPERATED		TIES * NO. OF #2 WIRES IF MORE THAN TWO; # ISOLATED GROUND WIRE
	SWITCH - SLIDER TYPE ELECTRONIC DIMMER (WATTAGE RATINGS AS REQUIRED)		HOMERUN: (4) #2, 3/4" C. TO PANEL A - CIR 135
	SWITCH - MOMENTARY CONTACT: SPDT CENTER OFF UON		STUB-OUT
	MANUAL MOTOR STARTER - POLES AND HEATERS AS REQUIRED		COPPER GROUND (SIZE PER PLANS)
	PHOTOELECTRIC SWITCH - 1500 VA UON		CIRCUIT UP
	SIGNAGE OUTLET CONNECTION		MOISTURE SEAL-OFF
	DEVICES AT 48" TO CENTER LINE UON (PER ADA)		30 AMP / 3 POLE (REPRESENTATIVE)
	DEVICES MOUNTED IN OR ABOVE BACKSPLASH, MAXIMUM HEIGHT ON WALLS - 48" TO TOP UON (PER ADA)		ALUMINUM
	DEVICES IN MULTI-COMPARTMENT FLUSH FLOOR MOUNTED UON		ABOVE FINISHED FLOOR
	RECEPTACLE - DUPLEX		ABOVE FINISHED GRADE
	RECEPTACLE - DUPLEX - HALF SWITCHED (TOP HALF)		AMP INTERRUPTING CURRENT
	RECEPTACLE - DUPLEX - INTEGRAL GFCI CIRCUITRY		AUTOMATIC TRANSFER SWITCH
	RECEPTACLE - DUPLEX - ISOLATED GROUND (ORANGE FACE) - NEMA 520R/1G		BACKBOARD
	RECEPTACLE - DOUBLE DUPLEX		CONDUIT (WITH FULL CORD IF OTHERWISE EMPTY)
	RECEPTACLE - DOUBLE DUPLEX - INTEGRAL GFCI CIRCUITRY		COPPER
	RECEPTACLE - SPECIAL TYPE (SEE ADDITIONAL NOTES)		EXISTING TO REMAIN
	RECEPTACLE(S) - CEILING MOUNTED		FUSE (DUAL-ELEMENT, TIME DELAY)
	PLUG MOLD SURFACE RACEWAY SYSTEM (2-CIRCUIT WITH OUTLETS 18" O.C. UON) MOUNTED ABOVE BACKSPLASH UON		FURNISHED BY OTHERS
	TELEPOWER POLE		FUSE PER EQUIPMENT NAMEPLATE
	SMOKE DETECTOR - LOCAL ONLY, 120V, W/INTEGRAL BATTERY AND ALARM HORN, WALL MOUNT AT 12" BELOW CEILING		GROUND FAULT CIRCUIT INTERRUPTER
	SMOKE DETECTOR - LOCAL ONLY, 120V, W/INTEGRAL BATTERY, STROBE, AND ALARM HORN, WALL MOUNT AT 12" BELOW CEILING		GROUND
	OUTLET - CLOCK		HAND-OFF-AUTOMATIC
	OUTLET - TELEPHONE		HORSEPOWER
	OUTLET - DATA		ISOLATED GROUND
	OUTLET - VOICE / DATA		KCMIL (300 KCMIL - 300K)
	OUTLET - TELEVISION		NON-FUSED
	OUTLET - DOOR BELL/BUZZER		NOT IN CONTRACT
	OUTLET - MICROPHONE		NIGHT LIGHT
	OUTLET - VOLUME CONTROL (48" TO TOP UON)		NOT TO SCALE
	OUTLET - SPEAKER 8" COAXIAL W/ BACK BOX AND GRILLE		EXISTING TO BE RELOCATED
	OUTLET - THERMOSTAT (REF. MECHANICAL DRAWINGS)		RIGID GALVANIZED STEEL
	TV / SECURITY CAMERA - FIXED (MOUNTING PER PLANS)		TRANSIENT VOLTAGE SURGE SUPPRESSION
	TV / SECURITY CAMERA - PTZ - PAN, TILT, ZOOM (MOUNTING PER PLANS)		UNSWITCHED
			UNINTERRUPTIBLE POWER SUPPLY
			UNLESS OTHERWISE NOTED
			WEATHER PROOF (NEMA 3R)
			EXISTING TO BE REMOVED
			TRANSFORMER

**ACKAL** A PROFESSIONAL CORPORATION  
 ARCHITECTS  
 105 CHAPEL DRIVE - LAFAYETTE, LOUISIANA 70506  
 337-988-5271 ph. - 337-988-5272 fax  
 www.ackalarchitects.com

INTERIOR TENANT IMPROVEMENT FOR:  
**IMMUNOTEK BIO CENTERS, LLC**  
 4550 LAKE WORTH ROAD  
 OFFICE DEPOT PLAZA, SUITE B-5  
 LAKE WORTH, PALM BEACH COUNTY, FL 33463

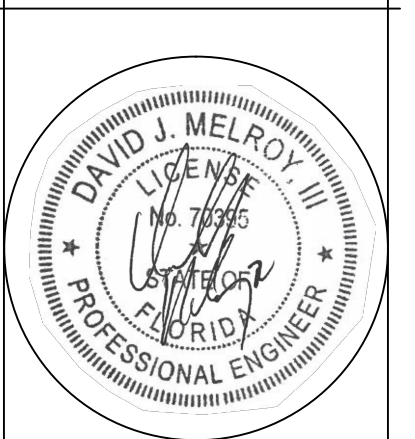

SEPT. 02, 2016  
 COPYRIGHT © 2016 ACKAL ARCHITECTS, APC.  
 THIS DOCUMENT IS THE PROPERTY OF ACKAL ARCHITECTS, APC.  
 THIS DOCUMENT MAY NOT BE COPIED, REPRODUCED OR USED WITHOUT WRITTEN CONSENT FROM ACKAL ARCHITECTS, APC.

proj. no. 16-002  
 date: 08-02-2016  
 project architect: B.A.  
 project manager: A.D.  
 drawn by: MSA  
 file name: LAKEWORTH  
 revised: A, ADDENDUM 1, 04-02-2016  
 plot scale: AS NOTED  
 sheet name:  
 SYMBOL LIST AND  
 GENERAL NOTES

