01 TPO ROOFING SYSTEM OVER R-19 RIGID INSULATION ON GALVANIZED METAL DECK. PROVIDE TAPERED INSULATION TO FORM CRICKETS AND SLOPE TO DRAIN AS INDICATED.

02 TPO ROOFING SYSTEM OVER FIBER BOARD ON SLEEPERS AS REQUIRED TO SLOPE ROOF AS INDICATED. SEE DETAILS FOR MORE INFORMATION. (NOT USED, THIS SHEET)

03 PRE-ENGINEERED CANOPY SYSTEM. SEE DETAILS FOR MORE INFORMATION. (NOT USED, THIS SHEET)

04 0.050" PRE-FINISHED ALUMINUM COPING WITH WIND CLIPS AT 18" O.C. MAX. SEE DETAILS FOR MORE INFORMATION.

05 0.040" PRE-FINISHED ALUMINUM GUTTER. SEE DETAILS FOR MORE INFORMATION.

06 THRU WALL ROOF SCUPPER

07 OVERFLOW DRAIN, PRIME & PAINT STRAINER

08 ⅞" STUCCO ON GALV. P.B. METAL LATH ON 15# FELT ON ½" "DENSGLASS GOLD" SHEATHING

09 STUCCO BUTTRESS BEYOND

10 ALL COPING CORNERS TO BE SHOP FABRICATED, MITERED, WELDED AND GROUND SMOOTH. FOLDED AND RIVETED CORNERS WILL NOT BE ACCEPTED. (NOT USED, THIS SHEET)

11 3/4" STUCCO ON GALV. P.B. MTL. LATH ON 15# FELT ON 8" CMU

12 "FOAM-IN" INSULATION (R-6 APPROXIMATE VALUE)

13 CURTAIN WALL GLAZING SYSTEM BY "KAWNEER" OR EQUAL

14 10" "KAWNEER VERSOLEIL" LOUVERS ATTACHED TO PRIMED & PAINTED 4X4 GALV. STEEL POSTS, TYPICAL

15 ⅞" STUCCO ON FOAM TRIM ACCENT BAND-SLOPE TOP 1"

16 PVC DOWNSPOUT CONCEALED IN BUTTRESS. CONNECT TO STORM DRAIN SYSTEM BELOW GRADE-SEE CIVIL DRAWINGS

17 STRUCTURAL STEEL BEAM-SEE STRUCTURAL DRAWINGS

18 FRAMELESS TEMPERED GLASS WALL SYSTEM BY "CRL" OR EQUAL

19 METAL STUD JOIST FRAMING-SEE STRUCTURAL DRAWINGS

20 SCHEDULED FLOOR FINISH ON REINFORCED CONCRETE SLAB-SEE STRUCTURAL DRAWINGS

21 PAVERS / CONCRETE WALKWAY-SEE CIVIL DRAWINGS

22 2X P.T. WOOD BLOCKING AS REQUIRED

23 CONTINUOUS BACKER ROD & SEALANT

24 ⅝" TYPE "X" GYP. BD. CEILING ON 6" METAL STUDS @ 16" O.C.

25 REINFORCED CONCRETE SLAB-SEE STRUCTURAL DRAWINGS

26 ½" GALV. STEEL JOIST SEAT ⊵ W/ GALV. HEADED STUD EMBED ON REINFORCED GROUT FILLED TIE BEAM-SEE STRUCTURAL DRAWINGS

27 PRE-ENGINEERED STEEL ROOF TRUSS-SEE STRUCTURAL DRAWINGS

28 PRE-ENGINEERED REINFORCED CONCRETE LINTEL-SEE STRUCTURAL DRAWINGS

29 CONTINUOUS PRE-FINISHED ALUMINUM FLASHING

30 PRE-ENGINEERED AWNING

31 PRE-FINISHED 0.02" ALUMINUM BRAKE METAL ON ½" DENSLASS SHEATHING/WD. BLOCKING.

32 SOFFIT VENT W/ SCREEN

33 STUCCO CONTROL JOINT

34 ACT SYSTEM

35 EXTERIOR LIGHT

36 DASHED LINE AT INTERIOR OF EXTERIOR WALL DENOTES FUTURE 5/8" GWB ON 6" GALV. METAL STUD FURRING WITH 5-1/2" BATT INSULATION (R-19 NOMINAL) TO BE INSTALLED AS PART OF TENANT BUILD-OUT (N.I.C. FOR SHELL CONTRACT). TYPICAL

KEY NOTES (XX) REFERENCED BY THIS SYMBOL

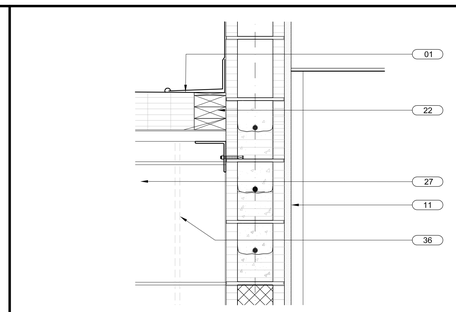

DETAIL SECTION 15
SCALE 1-1/2" = 1'-0"

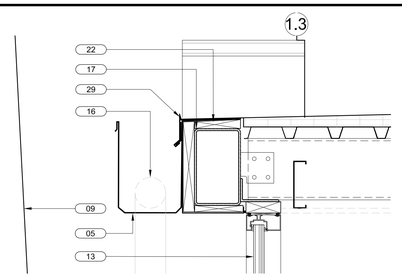

DETAIL SECTION 9
SCALE 1-1/2" = 1'-0"

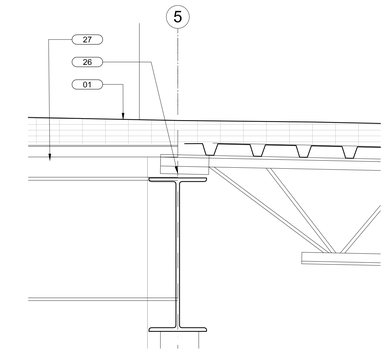

DETAIL SECTION 4
SCALE 1-1/2" = 1'-0"



DETAIL SECTION 14
SCALE 1-1/2" = 1'-0"

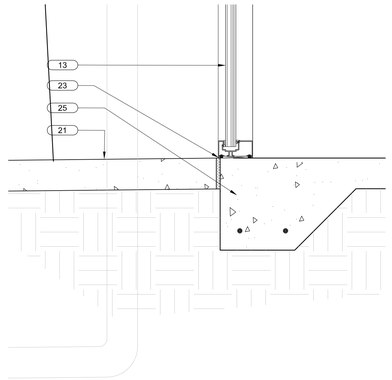

DETAIL SECTION 8
SCALE 1-1/2" = 1'-0"

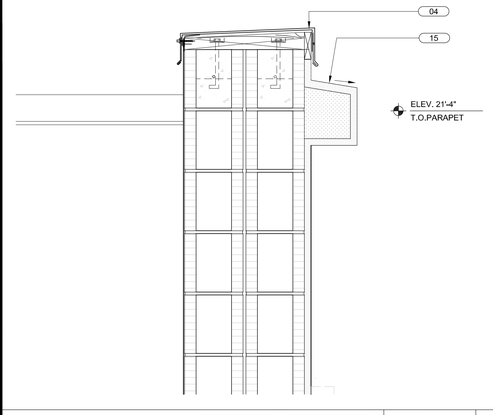

DETAIL SECTION 3
SCALE 1-1/2" = 1'-0"

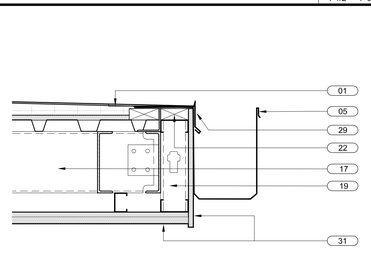

DETAIL SECTION 13
SCALE 1-1/2" = 1'-0"

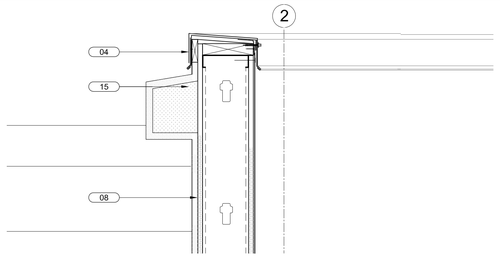

DETAIL SECTION 7
SCALE 1-1/2" = 1'-0"

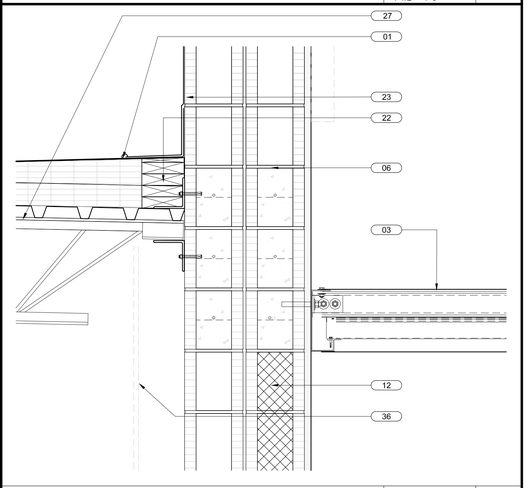

DETAIL SECTION 2
SCALE 1-1/2" = 1'-0"



DETAIL SECTION 18
SCALE 1-1/2" = 1'-0"

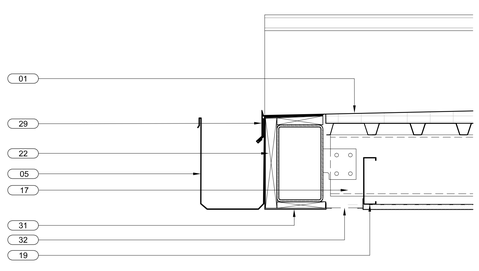

DETAIL SECTION 12
SCALE 1-1/2" = 1'-0"

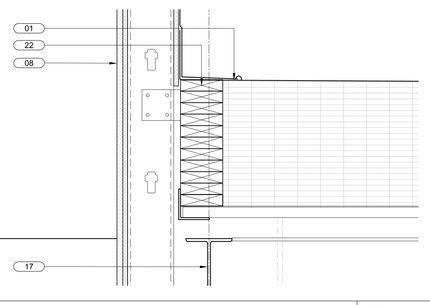

DETAIL SECTION 6
SCALE 1-1/2" = 1'-0"

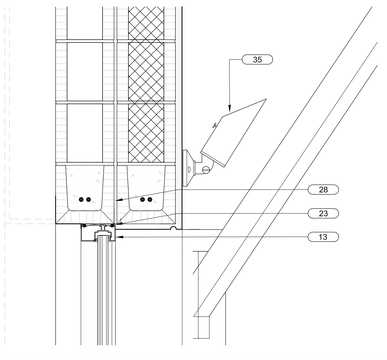

DETAIL SECTION 1
SCALE 1-1/2" = 1'-0"



DETAIL SECTION 17
SCALE 1-1/2" = 1'-0"

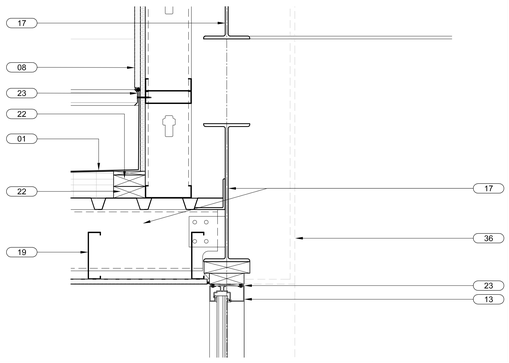

DETAIL SECTION 10
SCALE 1-1/2" = 1'-0"



DETAIL SECTION 16
SCALE 1-1/2" = 1'-0"

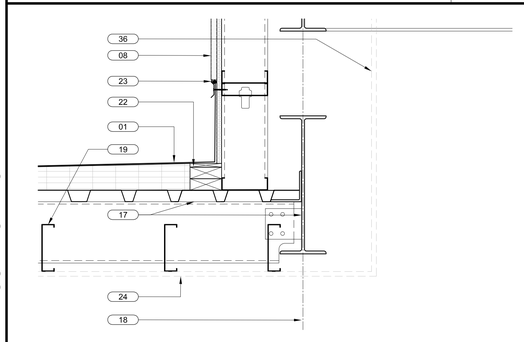

DETAIL SECTION 5
SCALE 1-1/2" = 1'-0"

api(+)
2709 Rocky Point Dr. 201 T 813 + 281 9299
Tampa, Florida 33607 USA F 813 + 281 9292
License No AAC001935 apiplus.com

BULLETIN LOG

minto

WESTLAKE VISITOR CENTER
CITY OF WESTLAKE
PALM BEACH COUNTY, FLORIDA

ISSUE DATE: - 09-30-16
ISSUED FOR:
PERMIT - BUILDING SHELL ONLY
©AS DATED ARCHITECTURE PLUS INTERNATIONAL, INC.

REVISION LOG

STATE REGISTRATIONS

FL #AAC001935 NC #8581
SC #6109 GA #10079
TN #00102675

Juan F. Romero AIA. License No. AR0007793
TO THE BEST OF THE KNOWLEDGE OF THE ARCHITECTS AND ENGINEERS, SAID PLANS AND SPECIFICATIONS COMPLY WITH THE APPLICABLE MINIMUM BUILDING CODES AND THE APPLICABLE HANDICAPPED SAFETY STANDARDS.

WESTLAKE VISITOR CENTER
PROJECT NAME

DETAIL SECTIONS
SHEET NAME

PROJECT NUMBER: 2016.037
DRAWN BY: DF/CV CHECKED BY: TM/PC
SCALE:

A3.21
SHEET NUMBER