




**MICHAEL B. SCHORAH & ASSOCIATES, INC.**  
 ENGINEERS • SURVEYORS • DEVELOPMENT CONSULTANTS  
 TEL: (561) 968-0080  
 EBF# 2438 FAX: (561) 642-9726 www.schorah.com  
 LB# 2438  
 1850 FOREST HILL BLVD., SUITE 206  
 WEST PALM BEACH, FLORIDA 33406

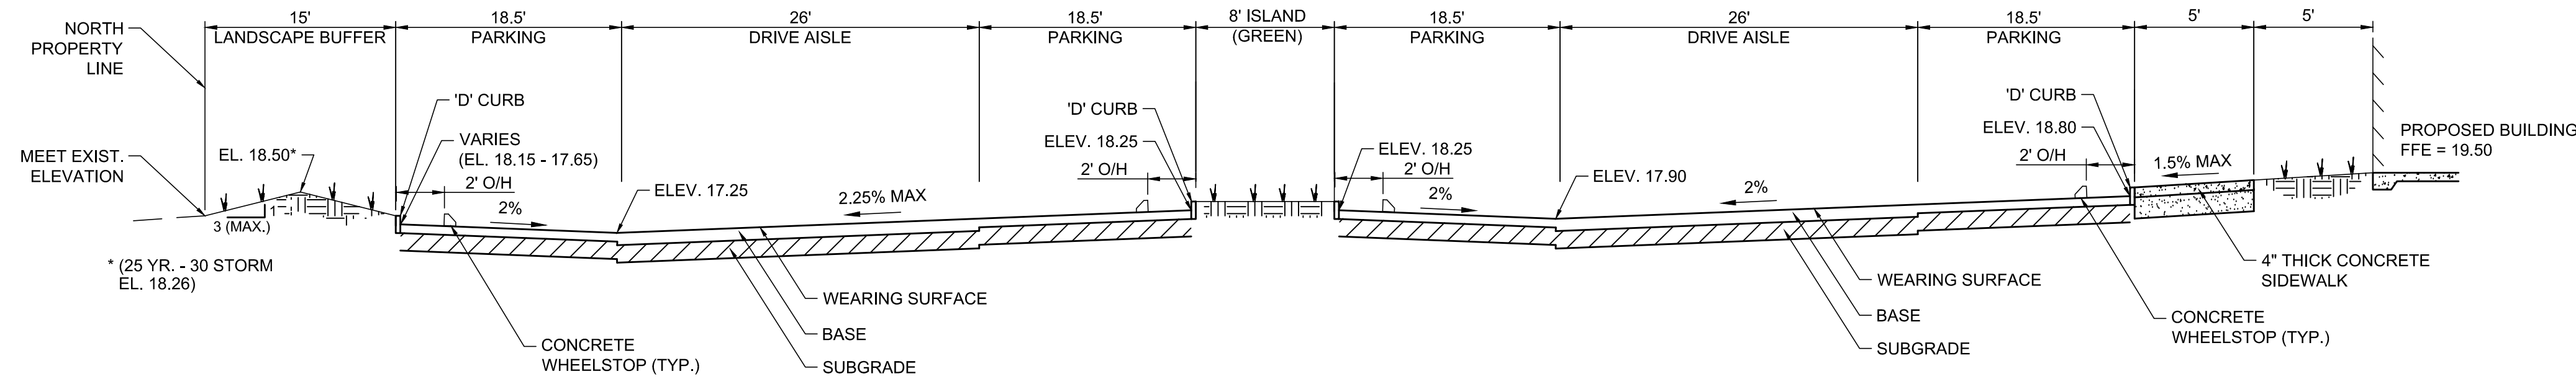


**SECTION A-A**  
NO SCALE

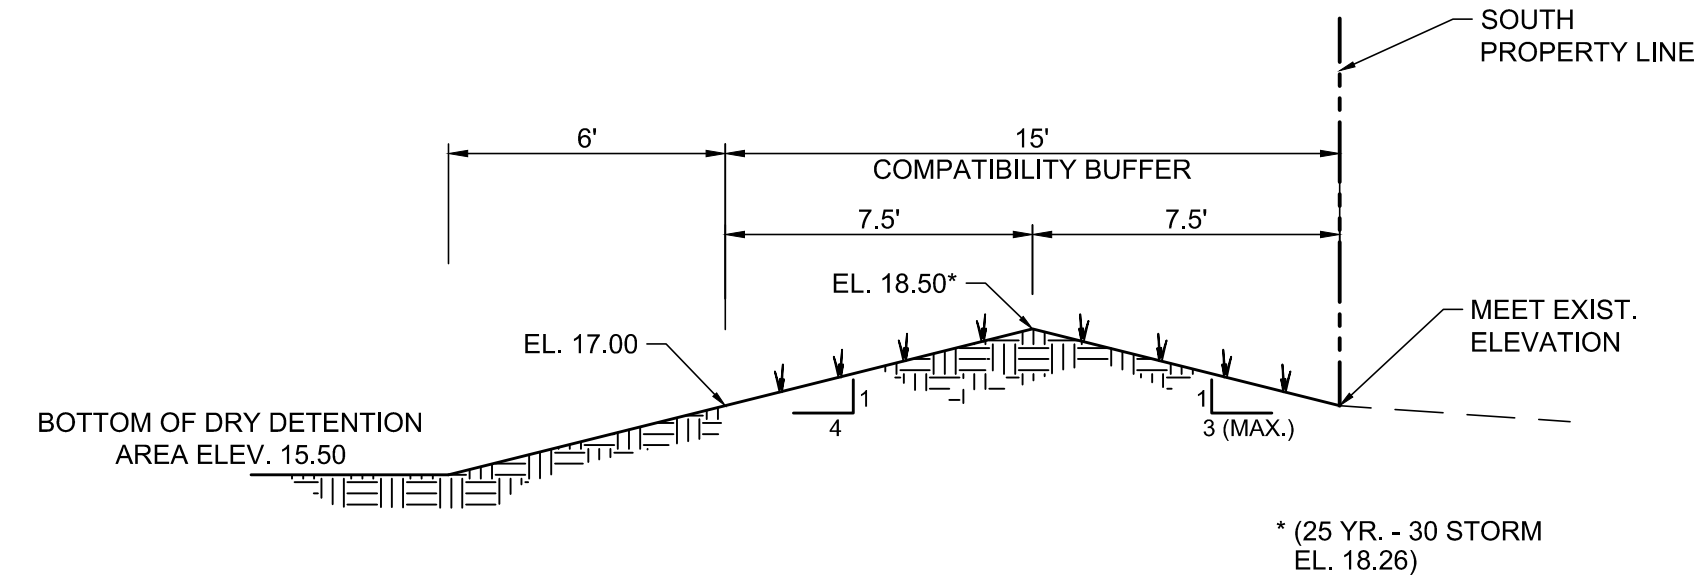

**SECTION B-B**  
NO SCALE

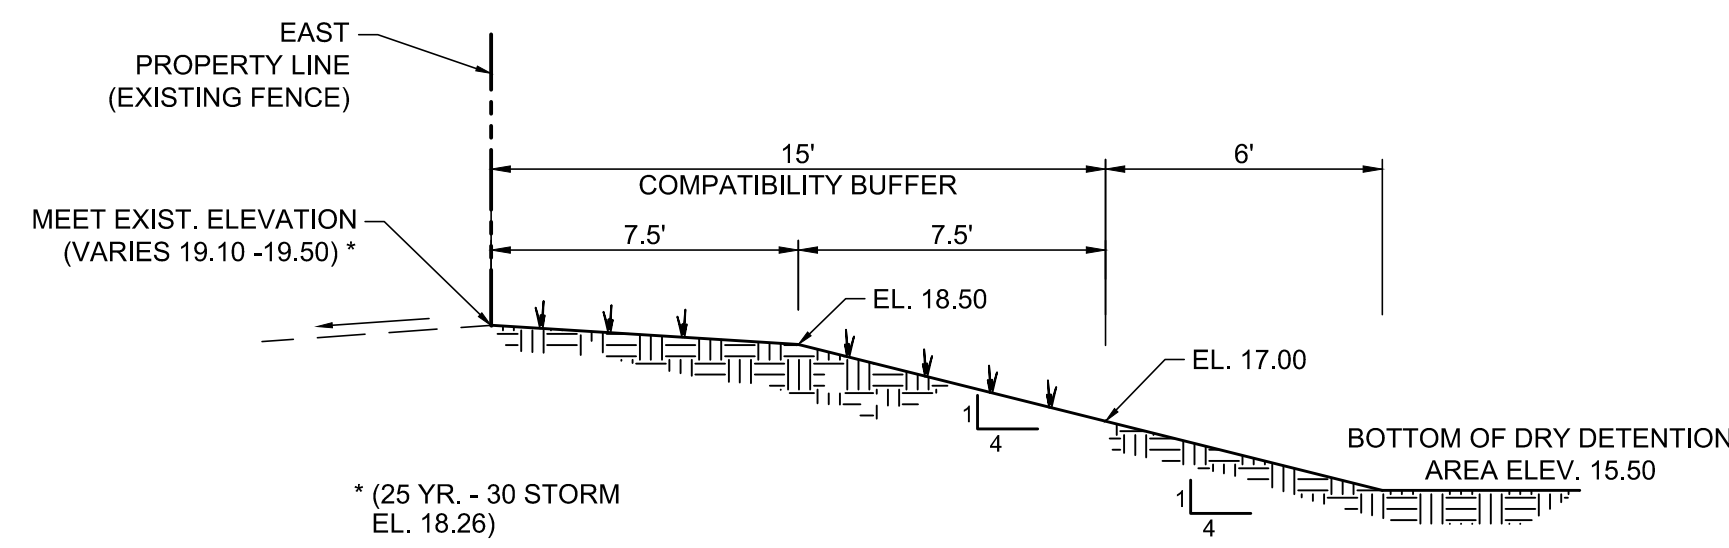

**SECTION C-C**  
NO SCALE

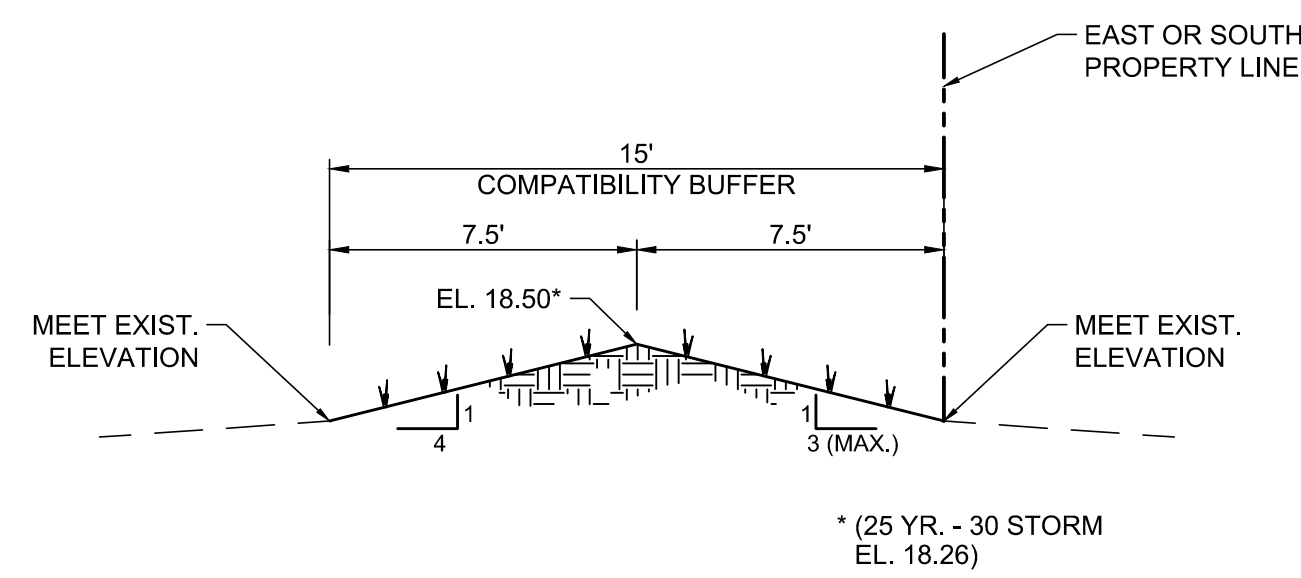

**SECTION D-D**  
NO SCALE

PAVING SPECIFICATIONS FOR SITE			
TYPE	WEARING SURFACE	BASE	SUB-GRADE
ASPHALT PAVEMENT (DRIVE AISLE)	1 1/2" THICK, TYPE S-II ASPHALTIC CONCRETE SURFACE COURSE IN TWO EQUAL LIFTS	8" THICK BASEROCK COMPACTED TO 98% MAXIMUM DRY DENSITY PER A.A.S.H.T.O. T-180	12" THICK STABILIZED (LBR-40) COMPACTED TO 98% MAXIMUM DRY DENSITY PER A.A.S.H.T.O. T-180
ASPHALT PAVEMENT (PARKING)	1 1/2" THICK, TYPE S-II ASPHALTIC CONCRETE SURFACE COURSE IN TWO EQUAL LIFTS	6" THICK BASEROCK COMPACTED TO 98% MAXIMUM DRY DENSITY PER A.A.S.H.T.O. T-180	12" THICK STABILIZED (LBR-40) COMPACTED TO 98% MAXIMUM DRY DENSITY PER A.A.S.H.T.O. T-180
CONCRETE WALKS/ PAVEMENT	4" THICK, CLASS I (2500 PSI) CONCRETE AT SIDEWALK. 6" THICK CLASS I (3000 PSI) W/ 6x6 W1.4xW1.4 W.W.M. AT PAVEMENT.	NONE	12" THICK COMPACTED TO 98% MAXIMUM DRY DENSITY PER A.A.S.H.T.O. T-180

REVISIONS

DRAWN/CHECKED: JV	SCALE: NO SCALE	DATE: JULY 2016
JORGE VALLE-PELLOT, P.E. FLORIDA LICENSE # 77039 FOR MICHAEL B. SCHORAH AND ASSOCIATES, INC.		

PROJECT: FLORENCE FULLER CHILD DEVELOPMENT CENTER	DESCRIPTION: PAVING AND DRAINAGE DETAILS
---	--

JOB NO. 1669
SHEET NO. 7
OF 14