




GENERAL NOTES:

1. THE CONTRACTOR SHALL REFER TO THE ARCHITECTURAL DRAWINGS FOR THE EXACT MOUNTING LOCATION OF ALL DEVICES PRIOR TO ROUGH-IN.
2. ALL LIGHT FIXTURES SCHEDULED WITH A BATTERY PACK OR DESIGNATED 'NL' SHALL BE CIRCUITED WITH AN UN-SWITCHED HOT CONDUCTOR.
3. ALL MOTION DETECTORS/OCCUPANCY SENSORS SHALL BE INFRARED/MICROPHONIC DUAL TECHNOLOGY TYPE.
4. THE CONTRACTOR SHALL COORDINATE DEVICE AND FACEPLATE COLORS/STYLE WITH THE ARCHITECT PRIOR TO INSTALLATION.
5. ALL LIGHTING CIRCUITS SHALL BE ROUTED THROUGH LIGHTING CONTROL PANELS AS SCHEDULED ON SHEET E02. LIGHTING CONTROL PANEL SHALL OVERRIDE ALL LOCAL SWITCHING INDICATED ON THIS PLAN.

SHEET NOTES:

1. EXTEND AND CONNECT CIRCUITING FROM JUNCTION BOX TO OUTLETS IN AREA WITH SAME CIRCUIT NUMBERS, ROUTE #2 CONDUCTORS (MINIMUM) THROUGHOUT, UNLESS NOTED OTHERWISE.
2. LIGHTING CONTROL PANEL OVERRIDE SWITCH. VERIFY EXACT MOUNTING LOCATION WITH END USER.
3. PROVIDE MANUAL CONTROL OF CEILING MOUNTED OCCUPANCY SENSORS. PROVIDE ALL POWER AND CONTROL CONDUITS AND CONDUCTORS AS REQUIRED.
4. AREA NO IN SCOPE OF WORK.

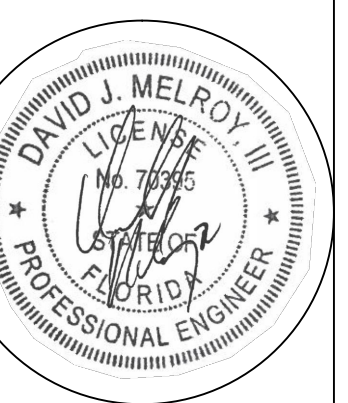

AUG. 02, 2016
 COPYRIGHT © 2016 ACKAL ARCHITECTS, APC.
 THIS DOCUMENT IS THE PROPERTY OF
 ACKAL ARCHITECTS, APC.
 REPRODUCTION OR USE WITHOUT
 WRITTEN CONSENT FROM
 ACKAL ARCHITECTS, APC.

proj. no. 16-002
 date: 08-02-2016
 project architect: B.A.
 project manager: A.D.
 drawn by: MSA
 file name: LAKEWORTH
 revised:
 plot scale: AS NOTED
 sheet name:
 LIGHTING
 PLAN

sheet no.
E2.2

A LIGHTING PLAN
 E2.2 1/8" = 1'-0"

B SBI - DONOR FLOOR SWITCH BANK DIAGRAM
 E2.2 NTS

