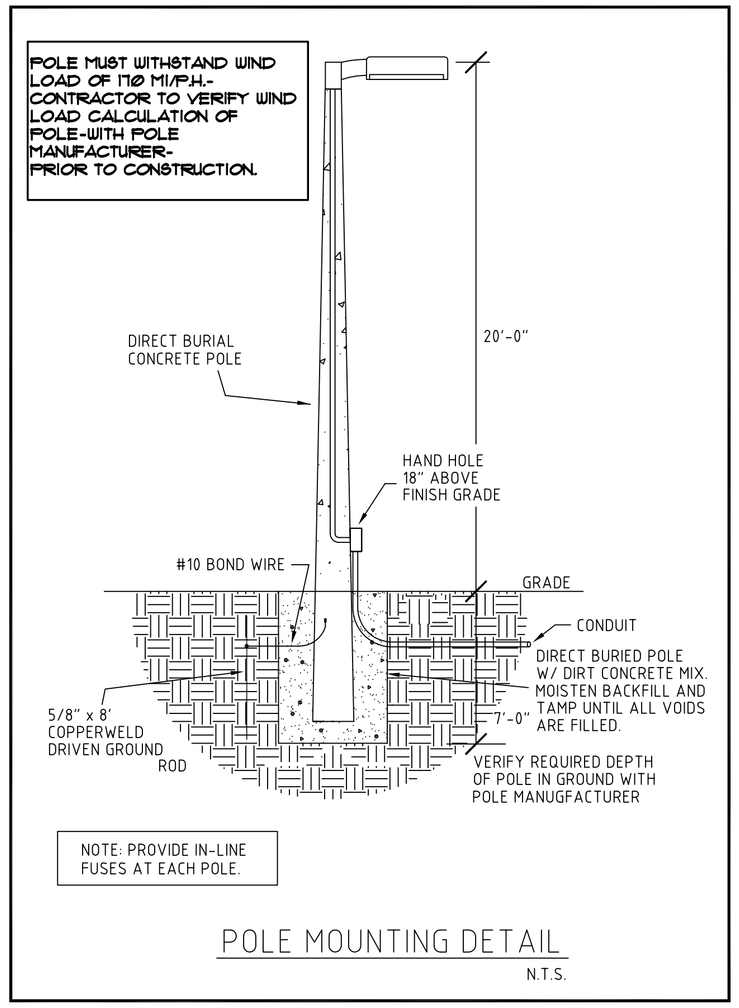

POLE MOUNTING DETAIL

N.T.S.

Luminaire Schedule							
Symbol	Qty	Label	Arrangement	Total Lamp Lumens	LLF	Description	Lum. Watts
	2	SA	SINGLE	N.A.	0.900	SPAULDING CL1-x-60L-1-5K-3-BC POLE MTD. - 20' A.G.	140.6
	4	SB	SINGLE	N.A.	0.900	HUBBELL LMC-30LU 5K 3 XX BLDG. MTD. - 15' A.G.	71

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
ENTRY & PARKING	Illuminance	Fc	2.54	3.8	1.0	2.54	3.80
PROPERTY LINE LOWER	Illuminance	Fc	1.13	2.9	0.0	N.A.	N.A.
PROPERTY LINE REAR	Illuminance	Fc	0.00	0.0	0.0	N.A.	N.A.
PROPERTY LINE UPPER	Illuminance	Fc	0.56	1.7	0.0	N.A.	N.A.
REAR & SIDES	Illuminance	Fc	2.04	5.5	0.1	20.40	55.00

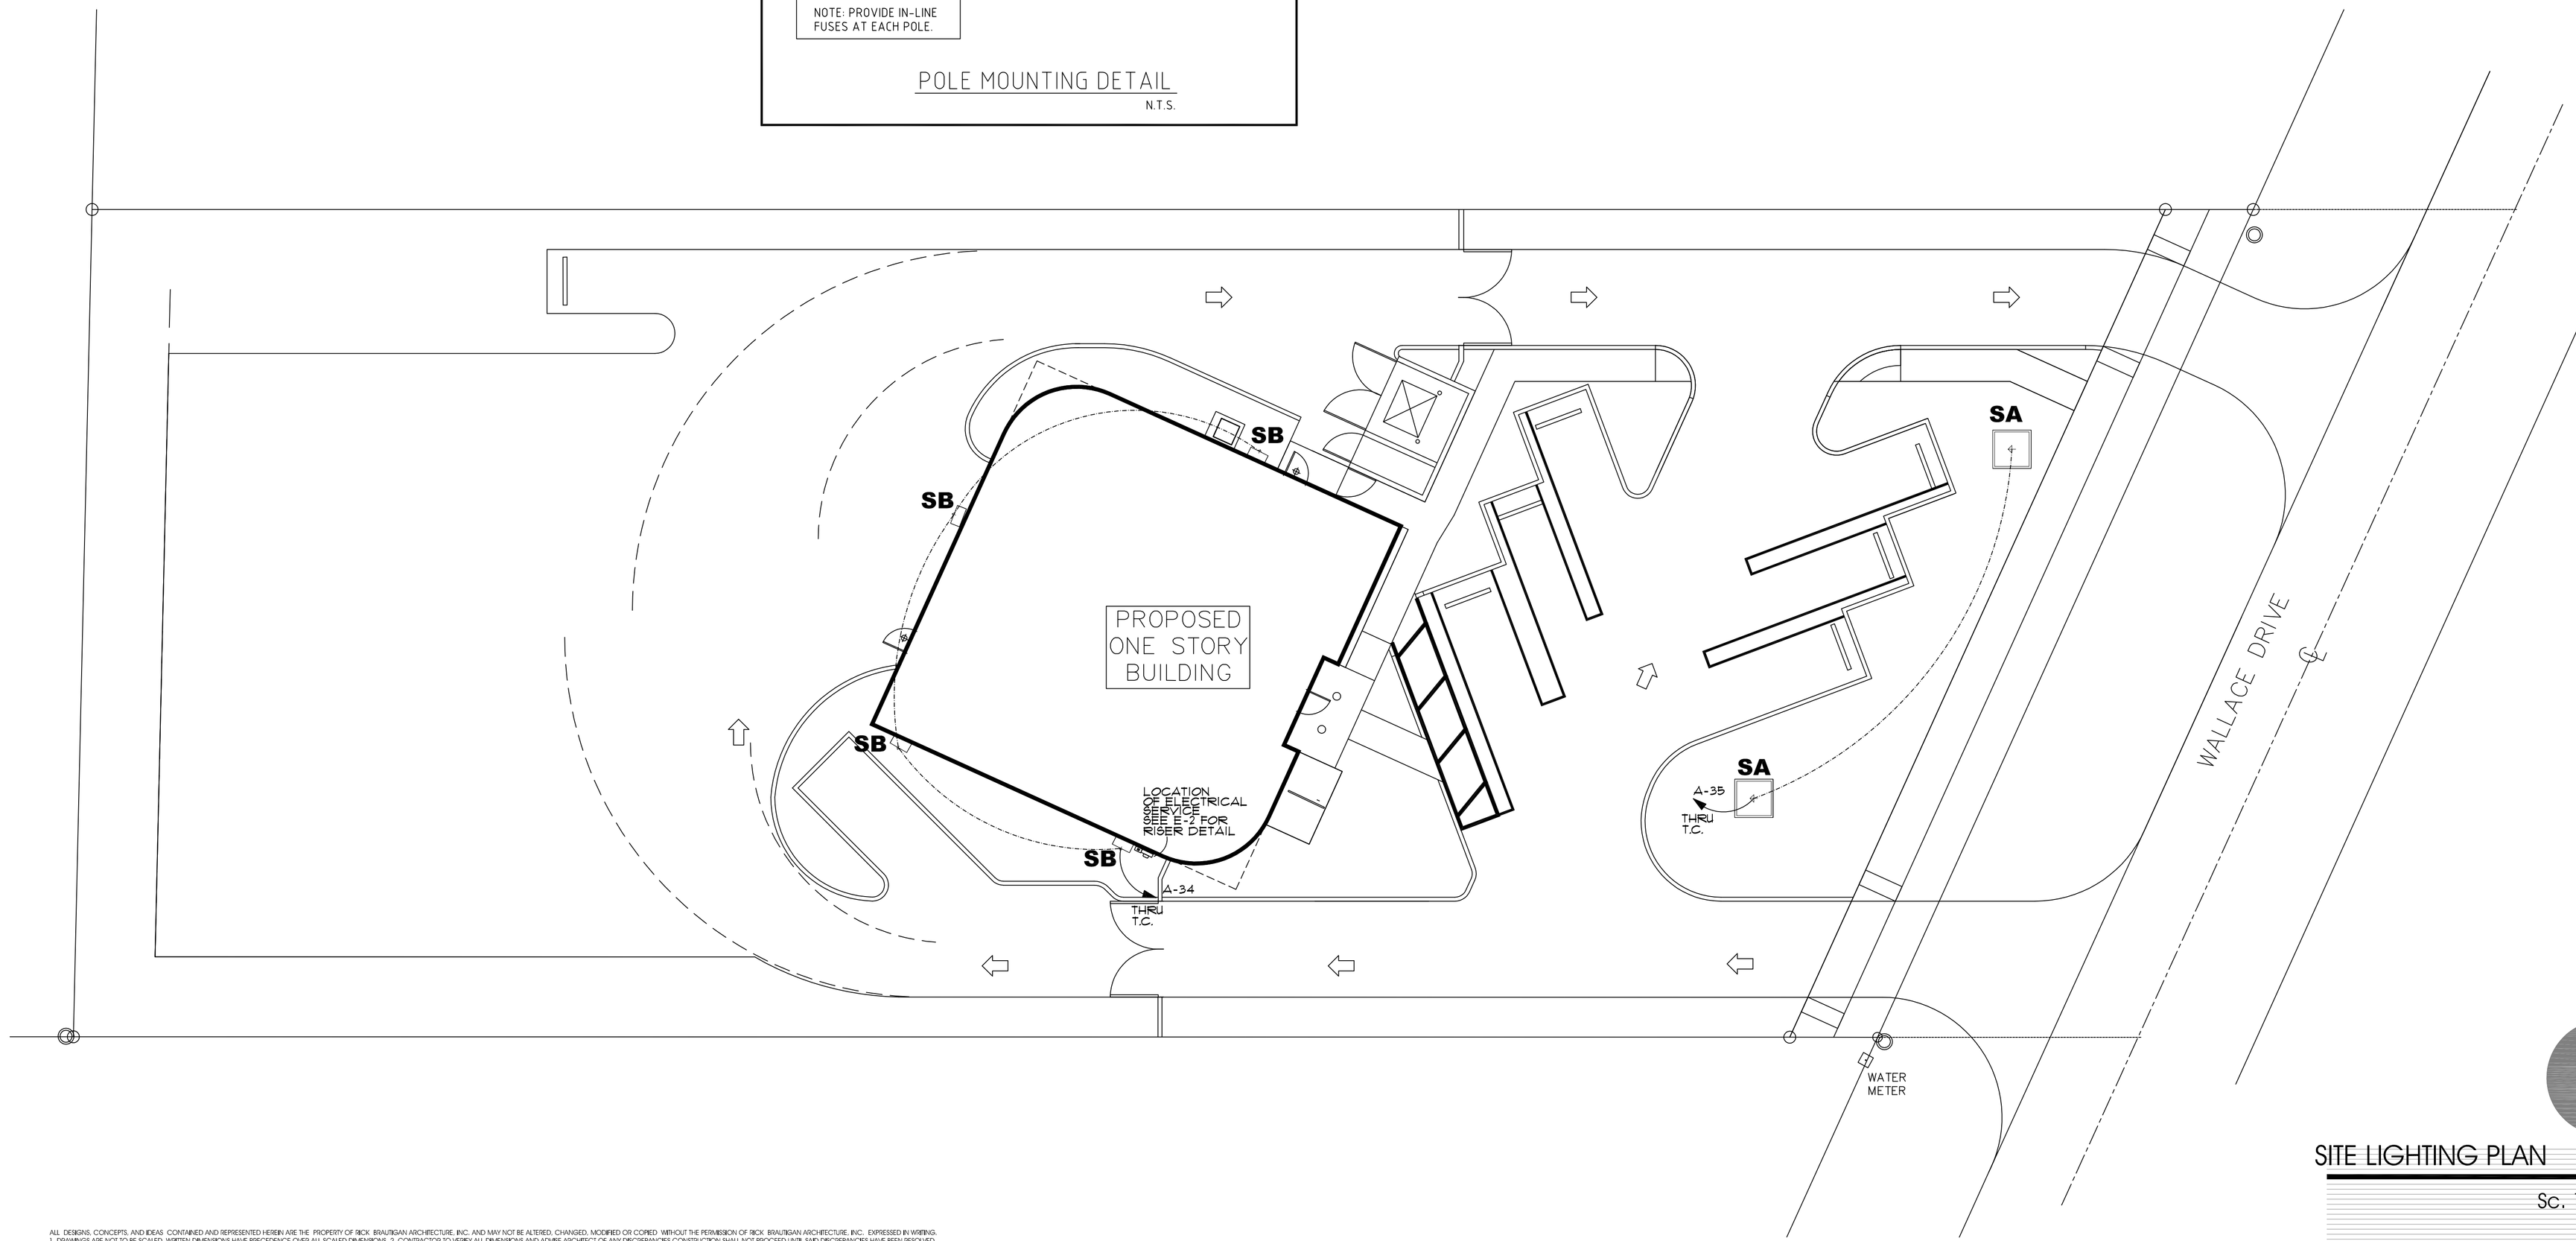

SITE LIGHTING PLAN

Sc. 1"=10'-0"

RICK BRAUTIGAN ARCHITECTURE
1025 S Dixie Highway
Delray Beach, FL 33483
Ph: 561.272.9086
Fx: 561.272.5636
AAC002029

PRELIMINARY SET: 05/18/15

NOTE:
ANY DESIGN CHANGES, TO THE SYSTEM COVERED BY THESE PLANS WITHOUT PRIOR APPROVAL OF THE ENGINEER WHO PREPARED THESE PLANS, WILL NULL AND VOID THESE PLANS AND THE REVISED INSTALLATION. IN ADDITION, ALL EXPENSES ASSOCIATED WITH RETURNING THE SYSTEM TO ITS ORIGINAL DESIGN WILL BE THE RESPONSIBILITY OF THE COMPANY WHICH APPROVED THESE CHANGES. FINAL BID TO INCLUDE PERMIT COMMENTS.

FORMICA & ASSOCIATES Inc.
Consulting Engineers
3500 N.W. Boca Raton Blvd.
Suite #711
Boca Raton, FL. 33431
TEL: (561) 368-3611 FAX: (561) 368-4733
Certificate #00006815
Robert P. Formica P.E. License #19733
E-mail: bob@formicaengineering.com

Kelly Building for:
Schmidt Investment Properties, LLC
1302 Wallace Drive
Delray Beach, FL 33444

RBA. PN. 13714.09

REVISIONS

SL2

© PAUL RICHARD BRAUTIGAN, ARCHITECT AR0011073

ALL DESIGNS, CONCEPTS, AND IDEAS CONTAINED AND REPRESENTED HEREIN ARE THE PROPERTY OF RICK BRAUTIGAN ARCHITECTURE, INC. AND MAY NOT BE ALTERED, CHANGED, MODIFIED OR COPIED WITHOUT THE PERMISSION OF RICK BRAUTIGAN ARCHITECTURE, INC., EXPRESSED IN WRITING.
1. DRAWINGS ARE NOT TO BE SCALED. WRITTEN DIMENSIONS HAVE PRECEDENCE OVER ALL SCALED DIMENSIONS. 2. CONTRACTOR TO VERIFY ALL DIMENSIONS AND ADVISE ARCHITECT OF ANY DISCREPANCIES.CONSTRUCTION SHALL NOT PROCEED UNTIL SAID DISCREPANCIES HAVE BEEN RESOLVED.
3. NO MATERIALS OR SYSTEMS ARE TO BE FABRICATED UNTIL : A) ALL DIMENSIONS HAVE BEEN VERIFIED BY CONTRACTOR B) SHOP DRAWINGS HAVE BEEN REVIEWED AND ACCEPTED BY THE ARCHITECT